


TE-32

Highlift Tape Edge System



The TE-32 remains one of the most popular and dependable tape edge machines in the industry.

S · P · U · H · L
ANDERSON™

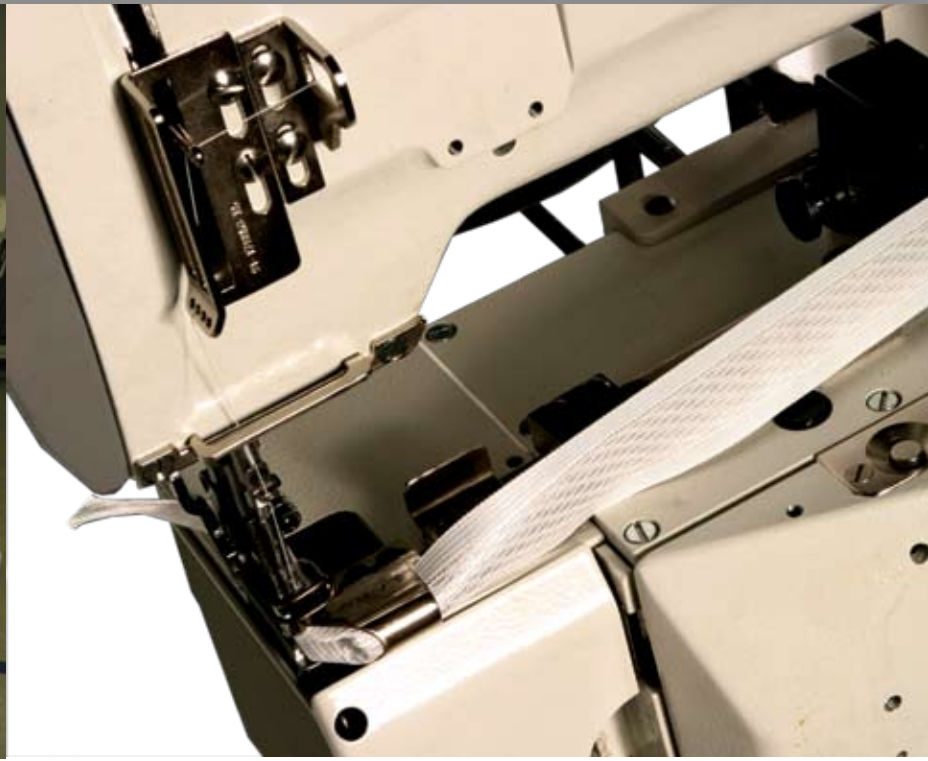

Min Mattress height	6" (152mm)
Max Mattress height	26" (660mm)
Max Mattress weight	200 lbs
Max Sewing Speed	3,500 RPM
Recommended Speed	3,000 RPM
SPI	6
Needle Type	62 x 59
Needle Size	#24/180
Voltage	230 v
Current (amps)	20a
Air pressure (psi/bar)	n/a
Air consumption (cfm)	n/a
Dimensions	88in x 73in (2.2 m x 1.8 m)

- Pfaff sewing head built specifically for tape edge operations
- Designed to sew with standard or FR thread
- Variable speed drive motor with automatic slow-down for cornering and selectable speed range
- Electrical linear drive of both table height and sewing head angle
- Low maintenance operation and self lubricating system
- 1 1/4in (32 mm) binder included
- Speed: 3500 rpm @ 6 spi

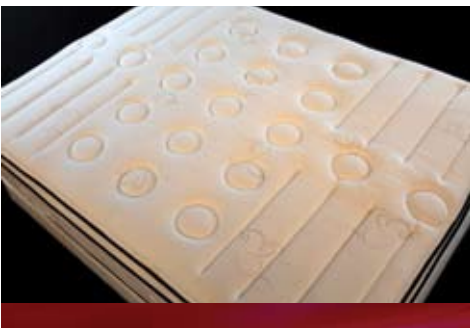

Global Systems Group® (GSG) is a collection of the world's leading mattress machinery companies. These GSG machinery companies represent leading edge technology in computerized quilting machines and panel cutters; automated and conventional sewing machines; and mattress packaging equipment.



GLOBAL SYSTEMS GROUP®

A DIVISION OF *Leggett & Platt*
INCORPORATED

13800 NW 4th Street
Sunrise, FL 33325 USA

800-326-4742 954-846-0300 www.GSGcompanies.com

